

Datario Lungo
Date stamp Long

BL / JL

MATERIALE

Acciaio Inox Temperato


DUREZZA

52-55 HRC

SPECIFICHE

Inserto fornito con molla


*New



BML



BAL



BTL



BGL




BSL




BHL



BQL



BHL





BQL

DIMENSIONI CORPO

DIMENSIONI INSERTO

D	L	M1	M	F	A	L	R	T	E	S	M
* 6	17	3	1,6x0,2	3,50	3,10	13	4	9	1,6	3	0,2
8	20	4	2,5 x 0,35	4	4,60	14	5	9	2,5	4	0,35
10	20	5	2,5 x 0,35	4	4,60	14	5	9	2,5	4	0,35
12	25	6	3 x 0,50	6	6,40	17	7	10	3	4	0,5
16	33	8	3,5 x 0,60	8	8,40	23	9	14	3,5	5	0,6
* 5	17	3	1,6x0,2	3,50	3,10	13	4	9	1,6	3	0,2

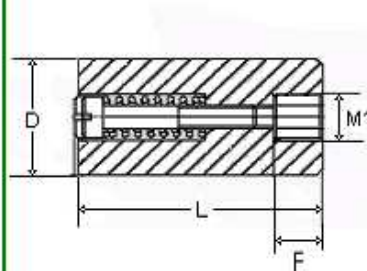

JHL



JAL